


JPL D-48439_c

**Earth Observing System (EOS)
Aura Microwave Limb Sounder (MLS)**

Version 5 Level-2 Near-Real-Time Data User Guide.

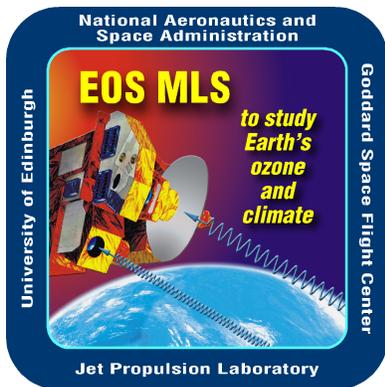

Alyn Lambert¹, William G. Read¹, Lucien Froidevaux¹, Michael J. Schwartz¹,
Frank Werner¹, Paul A. Wagner¹, William H. Daffer¹, Nathaniel J. Livesey¹,
Hugh C. Pumphrey², Gloria L. Manney³, Michelle L. Santee¹, Luis Millan¹,
Brian Knosp¹, Christina Vuu⁴, and Scott Gluck¹.

¹Jet Propulsion Laboratory, California Institute of Technology

²School of Geosciences, University of Edinburgh

³NorthWest Research Associates, New Mexico Institute of Mining and Technology

⁴Raytheon Intelligence and Space

Version 5.0x-NRT-1.0c (CL#22-0107)

December/January 7, 2022



Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California, 91109-8099

© 2022. All Rights Reserved.

Contents

1	Aura MLS Near-Real-Time Data Products	1
1.1	Aura MLS Instrument	1
1.2	Aura MLS Standard Product Retrievals	2
2	Aura MLS NRT Retrievals	2
2.1	Retrieval approach	2
3	NRT Data Quality Assessment	3
3.1	Temperature data screening	4
3.2	Ozone data screening	5
3.3	Carbon monoxide data screening	6
3.4	Water vapor data screening	7
3.5	Nitrous oxide data screening	7
3.6	Nitric acid data screening	8
3.7	Sulfur dioxide data screening	8
4	NRT Data Processing Outline	9
4.1	Recommendation for the treatment of MLS NRT data overlaps	10

Acknowledgment

Research carried out at the Jet Propulsion Laboratory, California Institute of Technology, is under a contract with the National Aeronautics and Space Administration (80NM0018D0004).

1 Aura MLS Near-Real-Time Data Products

This document describes the production and data quality assessment of near-real-time (NRT) data from the Aura MLS instrument using modified Level-2 algorithms. The use of the standard MLS processing suite is not practical for processing a NRT data stream because of the large demands on computational resources and the inherent latency involved. Consequently, the NRT retrievals have been adapted to reduce dramatically the computational resource requirements compared to the standard product processing suite. The NRT retrievals produce a subset of MLS products (T, O₃, CO, HNO₃, SO₂, H₂O, N₂O) using a reduced selection of the available MLS Level-1 radiances, coupled with lower fidelity forward model approximations which also neglect line-of-sight temperature and concentration gradients. As a result, the faster processing algorithms result in a degradation in the NRT data quality compared to the standard products. Typically most of the Level-2 NRT data are produced within 5 hours and over 94% are produced within 3 hours of the satellite observations.

Operational processing of the NRT products is carried out in an independent production stream at the MLS Science Investigator-led Processing System (SIPS). The data are distributed through a subscription service by the NASA Goddard Earth Sciences Data and Information Services Center (GES-DISC) :

<https://disc.gsfc.nasa.gov>

and are also available from the Land, Atmosphere Near real-time Capability for EOS (LANCE) website

<https://earthdata.nasa.gov/earth-observation-data/near-real-time/download-nrt-data/mls-nrt>

Orbit track visualizations of MLS NRT data are available for the following products and pressure levels : CO at 215 hPa, SO₂ at 147 hPa and H₂O, O₃, N₂O, and HNO₃ at 46 hPa on the NASA WorldView website :

<https://worldview.earthdata.nasa.gov>

1.1 Aura MLS Instrument

The Aura Microwave Limb Sounder [Waters, 1993; Waters et al., 2006] is a limb sounding instrument which measures thermal emission at millimeter and sub-millimeter wavelengths using seven radiometers to cover five broad spectral regions. The radiometric and spectral performance of the MLS instrument is covered in detail by Jarnot et al. [2006] for the GHz radiometers and by Pickett [2006] for the THz radiometer.

The MLS line-of-sight is in the forward direction of the Aura spacecraft flight track. The Earth's limb is scanned from the surface to 90 km every 24.7 s giving 240 scans per orbit spaced at 1.5° intervals (165 km) with a total of ~3500 vertical profiles per day and a nearly global latitude coverage from 82°S–82°N.

1.2 Aura MLS Standard Product Retrievals

The MLS limb radiance measurements are inverted using an optimal estimation retrieval [Livesey et al., 2006] to yield atmospheric profiles of temperature, geopotential height, ozone, humidity and other trace gases. The MLS data are currently being produced as version 5.0 and use GEOS-5 analyses as the a priori state for temperature. The data file format, characteristics, screening rules, and validation of the MLS Level-2 standard products corresponding to the NRT products is discussed in the v5.0 standard product data quality document (and references therein) available from:

https://mls.jpl.nasa.gov/data/v5-0_data_quality_document.pdf

2 Aura MLS NRT Retrievals

Level-2 v5.0-NRT algorithms for ozone, carbon monoxide, water vapor, nitrous oxide, nitric acid and sulfur dioxide are essentially unchanged from those of the v4 NRT stream. These Level-2 NRT algorithms employ a simplified forward model and subsequently are not as accurate as the retrievals that constitute the standard MLS products. However, the results are of scientific use and track the standard MLS products with reasonable fidelity as described in the following sections.

The primary improvement in the v5.0-NRT algorithm is the use of an artificial neural network (ANN) approach to estimate the temperature profiles from radiances from the nearest limb scan. The inputs to the ANNs are channels 1-25 of MLS bands 1 and 8 and channels 40-90 of band 22, each from pressure levels over the range 1000-0.001 hPa. 18 separate ANNs were trained for each 10-degree latitude bin from -90° to 90° . The networks were trained on 75% of the valid v5 MLS standard temperature product retrievals between 2005 and 2021 and their associated, nearest radiance profiles. The ANN processed results were validated using the remaining 25% of profiles. As the MLS v5.0 standard temperature product is used as “truth” in the training, the best-case output of the ANN is a computationally-inexpensive, high-fidelity preview of the v5.0 standard-production temperature product.

2.1 Retrieval approach

Standard MLS products are retrieved using a 2-D, “tomographic” retrieval where multiple limb scans are used to retrieve multiple profiles, including effects of horizontal gradients. Both the ANN NRT temperature retrieval and the optimal estimation retrieval of the other products are one-dimensional, in that they separately retrieve each profile from a single limb-scan of radiances with the assumption that the atmosphere is horizontally symmetric. No attempt is made to model along-track gradients. The NRT retrievals typically use a somewhat reduced set of radiances compared to those of the standard production retrievals and an optical depth criterion is applied to limit the use of some optically thicker channels.

The NRT HNO₃ profile data is a hybrid product of the 190-GHz ($p \leq 46$ hPa) and 240-GHz ($p \geq 68$ hPa) retrievals, with a transition between retrievals from the two bands slightly lower in the atmosphere than in the v5.0 standard-production algorithm.

2.1.1 Temperature

NRT Temperature is primarily retrieved from bands centered on the 118-GHz oxygen line: MLS band 1 is a 25-channel spectrometer that resolves the pressure-broadened line down to the upper troposphere; MLS band 22 is a high-resolution spectrometer that resolves the line center up into the mesosphere. These bands are supplemented by the 25 channels of band 8, centered on the weaker 239-GHz isotopic oxygen line, which allows radiation from deeper in the upper troposphere to be observed. Taken together, these bands provide temperature information from the uppermost troposphere through the stratopause and into the mesosphere and lower thermosphere. The standard NRT temperature product is taken from the ANN retrieval, but temperature is also retrieved by the optimal-estimation (OE) retrieval that provides the other NRT products. This diagnostic product is stored as the swath ‘Temperature-InitPtanStdProd’ in the diagnostic (DGG) output file. Although cloud screening is not implemented directly in the neural net NRT processor, it is trained using the standard product v5 temperatures which have been cloud screened.

The three panels in Figure 1 show examples of the global vertical profiles of correlation coefficient, root-mean square deviation and median bias for the ANN (black), v5 OE (green) and v4 OE (orange) near-real-time temperatures with respect to the Level-2 standard product temperatures. Clearly, the ANN NRT temperatures have a much greater fidelity to the standard product temperatures than the OE NRT temperatures.

2.1.2 240-GHz Region

SO₂, HNO₃, O₃, and CO are retrieved jointly in the 240-GHz region from a combination of two 25-channel filter-bank spectrometers (MLS radiance bands 7 and 9) and a 4-channel wide-band filter (MLS band 33).

2.1.3 190-GHz Region

H₂O, N₂O, HNO₃, and SO₂ are retrieved jointly in the 190-GHz region from a combination of three 25-channel filter-bank spectrometers (MLS radiance bands 2, 3, and 4).

3 NRT Data Quality Assessment

Except for temperature, the Level-2 NRT processor generates the same three data quality metrics on a profile-by-profile basis (status, quality, convergence) that are provided for the standard MLS processing and hence are available for immediate use in data assimilation schemes. Information on the HDF5-EOS data file structure and access to the quality flags is contained in the MLS v5.0 standard product data quality document:

https://mls.jpl.nasa.gov/data/v5-0_data_quality_document.pdf

In the sections below we indicate the recommended screening for the NRT data products. The NRT data are processed and distributed in overlapping granules (chunks) of typical length 46 profiles. In Section 4.1 we outline a procedure for the removal of redundant data from the chunk overlaps.

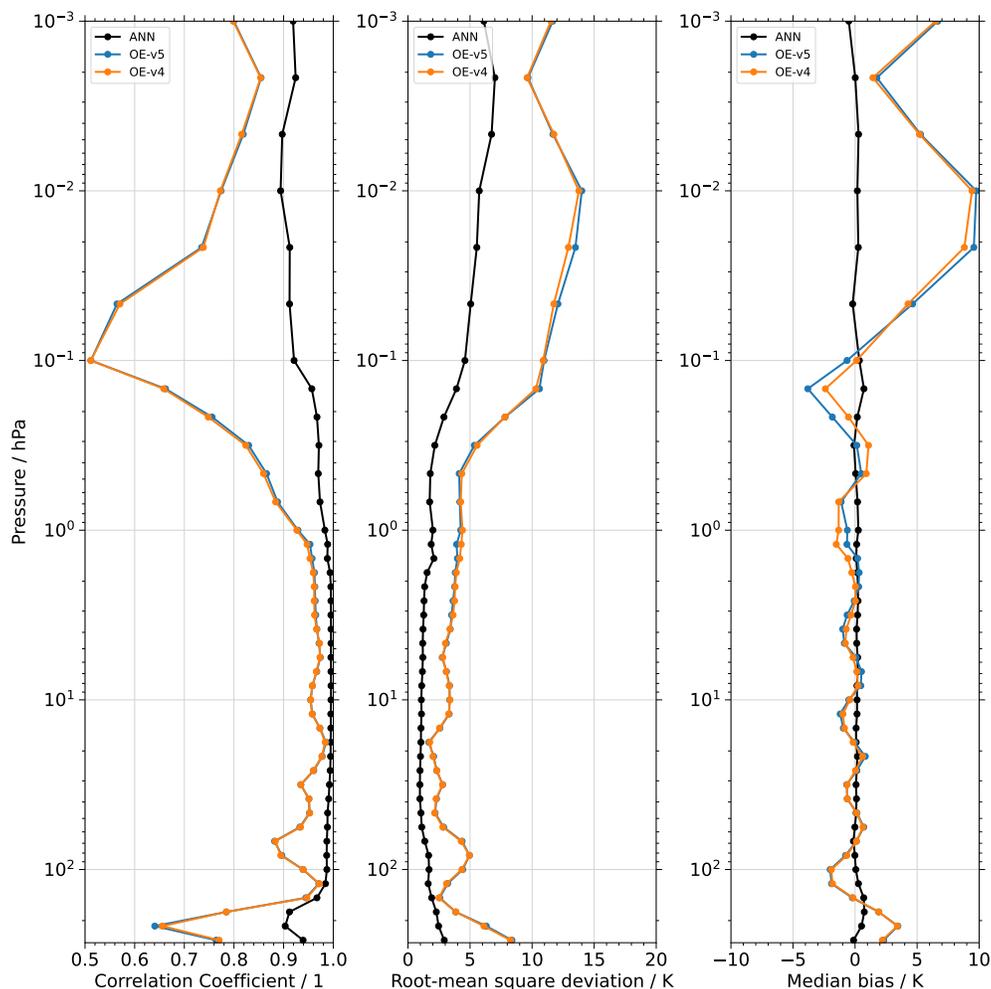


Figure 1: Comparisons of the NRT temperatures with the Level-2 standard product temperature for 1–7 December 2021. The three panels show the global vertical profiles of correlation coefficient, root-mean square deviation and median bias for the ANN (black), OE-v5 (green) and OE-v4 (orange) near-real-time temperatures with respect to the Level-2 standard product temperature.

3.1 Temperature data screening

Usable pressure range. NRT temperature profiles may be scientifically useful at pressure levels from 215 hPa to 0.001 hPa.

Precision. Each value has an associated precision, although these are not produced for individual profiles by the ANN retrieval. Rather, the reported values are the root sum square of (i) the typical level 2 precisions for the given pressure level taken from the training data and (ii) the root-mean-square deviation between the training and validation data set. Associated precisions that are negative should not be used. Negative precisions are assigned to values outside the valid pressure range, profiles in overlap regions, as well as those containing invalid radiances.

For the ANN NRT temperatures, the precision values are also used to represent the data quality.

The quality check assures that predictions at each pressure level are within a predefined confidence range. This range is derived from the minimum and maximum of the v5 MLS retrievals at each level (from both the training and validation data set) and the difference between the maximum and minimum value. If a profile contains a prediction, at any level, that is smaller than the minimum negative difference or larger than the maximum positive difference all the associated precisions are set to be negative.

Status flag. Not used for NRT temperature.

Quality. Not used for NRT temperature.

Convergence. Not used for NRT temperature.

Vertical resolution. Since the neural network models have been trained on the v5 level 2 temperature standard product retrievals, the vertical and horizontal resolutions are comparable to the standard product.

From 215 hPa – 147 hPa, retrievals have as much contribution from the adjacent level above as from the eponymous level. The retrieval vertical averaging kernel FWHM is ~ 5 km at 215 hPa, improving to 4 km at 147–100 hPa and to 3 km in the lower stratosphere. At 10 hPa, the vertical resolution is 4 km and it degrades to 8 km at 1.47 hPa and 10 km at 1 hPa.

Horizontal resolution. Horizontal resolution is 165 km, degrading to 195 km at the highest and lowest recommended levels.

Comments/Artifacts. Correlation coefficients between the level 2 temperature retrievals and NRT predictions are larger than 0.95 within the valid pressure range. For pressure levels between 146 and 0.3 hPa the 1st/99th percentile of the difference between the two data sets is smaller than 5 K. No significant NRT temperature biases are observed compared to the standard product at any pressure level.

3.2 Ozone data screening

Usable pressure range. NRT Ozone profiles are only recommended for scientific use at pressure levels from 261 hPa to 0.1 hPa.

Precision. Each value has an associated precision. Values with associated precisions that are negative (which indicates too strong an influence from the a priori) should not be used.

Status flag. Profiles with odd Status (typically less than 2 to 3% of profiles) should not be used. Typical good NRT profiles have Status=68, indicating that the temperature a priori uses the CIRA climatology rather than GEOS-5 temperature. There is no cloud retrieval as part of the NRT processing so the cloud bits of Status (16=“high cloud”, 32=“low cloud”) are never set. Retrievals for which there were not enough radiances (Status 325) are also typically poorly converged.

Quality. Profiles with Quality < 0.2 should not be used. This typically removes less than 1% of profiles, but this screening probably will have very little impact on scientific results and is not strongly recommended.

Convergence. Profiles with Convergence > 1.2 should not be used. This typically removes less than 0.5 to 1% of profiles. These profiles tend to have slightly poorer agreement with values from the v4.2 production retrieval than do those with lower convergence. However, removal of these profiles likely has very little impact on scientific results and is not strongly recommended.

Vertical resolution. The vertical resolution of the retrieval (averaging kernel FWHM) is 2.5–3 km for $p > 6.8$ hPa and 3–4 km for the pressure range $6.8 \text{ hPa} < p < 0.1 \text{ hPa}$.

Horizontal resolution. The horizontal resolution is 165–215 km.

Comments/Artifacts. In most of the stratospheric range, namely from about 68 to 1 hPa, typical biases between the NRT ozone and the v4.2 standard product amount to less than a few percent, with equally low scatter (standard deviation) in the differences. There are larger biases and scatter (typically up to 20-30%) for the lower mesosphere and into the upper mesosphere (the latter is not well measured, given the reduced choice of frequency channels for the NRT software); users interested in the lower mesosphere are advised to use MLS NRT values there with some caution.

3.3 Carbon monoxide data screening

Usable pressure range. v4.2-NRT Carbon monoxide profiles are only recommended for scientific use at pressure levels from 215 hPa to 0.1 hPa.

Precision. Each value has an associated precision. Values with associated precisions that are negative (which indicates too strong an influence from the a priori) should not be used.

Status flag. Profiles with odd Status (typically less than 2 to 3% of profiles) should not be used. Typical good NRT profiles have Status=68, indicating that the temperature a priori uses the CIRA climatology rather than GEOS-5 temperature. There is no cloud retrieval as part of the NRT processing so the cloud bits of Status (16=“high cloud”, 32=“low cloud”) are never set. Retrievals for which there were not enough radiances (Status 325) are also typically poorly converged.

Quality. Profiles with Quality < 0.2 should not be used. This typically removes less than 1% of profiles, but this screening probably will have very little impact on scientific results and is not strongly recommended.

Convergence. Profiles with Convergence > 1.2 should not be used. This typically removes less than 0.5 to 1% of profiles; these profiles tend to have slightly poorer agreement with values from the v4.2 production retrieval than do those with lower convergence. However, removal of these profiles likely has very little impact on scientific results and is not strongly recommended.

Vertical resolution. The vertical resolution of the retrieval (averaging kernel FWHM) is expected to be very similar to that of the v4.2 NRT product (~ 5.5 km at 215 hPa and 5 km at 100 hPa).

Horizontal resolution. The horizontal resolution is 235 km at 215 hPa and 165 km at 100 hPa.

Comments/Artifacts. Vertical averaging kernel at some levels in the UTLS have slightly negative responses to CO two levels below their nominal response levels. For example, extremely high CO mixing ratios at 215 hPa from convectively lofted fire plumes in 2009 and 2017 led to negative artifacts at 100 hPa, and a similar anomalous negative response at 68 hPa resulted from extremely elevated values at 147 hPa.

3.4 Water vapor data screening

Usable pressure range. v4.2-NRT water vapor profiles are only recommended for scientific use at pressure levels from 147 hPa to 1 hPa.

Precision. Each value has an associated precision. Values with associated precisions that are negative (which indicates too strong an influence from the a priori) should not be used.

Status flag. Profiles with odd Status should not be used. Typical good NRT profiles have Status=68, indicating that the temperature a priori uses the CIRA climatology rather than GEOS-5 temperature. There is no cloud retrieval as part of the NRT processing so the cloud bits of Status (16=“high cloud”, 32=“low cloud”) are never set.

Quality. Profiles with Quality ≤ 0 should not be used.

Convergence. Profiles with Convergence > 3.0 should not be used.

Vertical resolution. The vertical resolution of the retrieval (averaging kernel FWHM) is 2.1–3.5 km.

Horizontal resolution. The horizontal resolution is 165–170 km.

Comments/Artifacts. The 147 hPa H₂O is too dry for low values (higher latitudes) and possibly too moist for high values (lower latitudes). The morphology of the data is acceptable. The other levels at 121 hPa and smaller pressures agree well with the standard product v4.2 data.

3.5 Nitrous oxide data screening

Usable pressure range. v4.2-NRT nitrous oxide profiles are only recommended for scientific use at pressure levels from 100 hPa to 1 hPa.

Precision. Each value has an associated precision. Values with associated precisions that are negative (which indicates too strong an influence from the a priori) should not be used.

Status flag. Profiles with odd Status should not be used. Typical good NRT profiles have Status=68, indicating that the temperature a priori uses the CIRA climatology rather than GEOS-5 temperature. There is no cloud retrieval as part of the NRT processing so the cloud bits of Status (16=“high cloud”, 32=“low cloud”) are never set.

Quality. Profiles with Quality < 0.2 should not be used.

Convergence. Profiles with Convergence > 3.0 should not be used.

Vertical resolution The vertical resolution of the retrieval (averaging kernel FWHM) is 4.7–8.5 km

Horizontal resolution The horizontal resolution is 165–320 km.

Comments/Artifacts. On the 68-hPa surface N₂O NRT values in the tropics are 20–25% smaller than the standard v4.2 product.

3.6 Nitric acid data screening

Usable pressure range. v4.2-NRT nitric acid profiles are only recommended for scientific use at pressure levels from 100 hPa to 1.5 hPa.

Precision. Each value has an associated precision. Values with associated precisions that are negative (which indicates too strong an influence from the a priori) should not be used.

Status flag. Profiles with odd Status should not be used. Typical good NRT profiles have Status=68, indicating that the temperature a priori uses the CIRA climatology rather than GEOS-5 temperature. There is no cloud retrieval as part of the NRT processing so the cloud bits of Status (16=“high cloud”, 32=“low cloud”) are never set.

Quality. For pressure levels ≥ 68 hPa, profiles with Quality < 0.2 should not be used. For pressure levels ≤ 46 hPa, the Quality screening is not useful and the data should be used with caution.

Convergence. For pressure levels ≥ 68 hPa, profiles with Convergence > 1.2 should not be used. For pressure levels ≤ 46 hPa, the Convergence screening is not useful and the data should be used with caution.

Vertical resolution. The vertical resolution of the retrieval (averaging kernel FWHM) is 3.0–5.0 km.

Horizontal resolution. The horizontal resolution is 165–220 km.

Comments/Artifacts. The NRT HNO₃ profile data is a hybrid product of the 190-GHz ($p \leq 46$ hPa) and 240-GHz ($p \geq 68$ hPa) retrievals.

3.7 Sulfur dioxide data screening

Usable pressure range. v4.2-NRT sulfur dioxide profiles are only recommended for scientific use at pressure levels from 215 hPa to 10 hPa.

Precision. Each value has an associated precision. Values with associated precisions that are negative (which indicates too strong an influence from the a priori) can be used for volcanic injection detection, but the values will be underestimated compared to the standard product SO₂.

Status flag. Profiles with odd Status should not be used. Typical good NRT profiles have Status=68, indicating that the temperature a priori uses the CIRA climatology rather than GEOS-5 temperature. There is no cloud retrieval as part of the NRT processing so the cloud bits of Status (16=“high cloud”, 32=“low cloud”) are never set.

Quality. Profiles with Quality ≤ 0 should not be used.

Convergence. Profiles with Convergence > 1.8 should not be used.

Vertical resolution. The vertical resolution of the retrieval (averaging kernel FWHM) is 3.0–3.7 km.

Horizontal resolution. The horizontal resolution is 165 km.

Comments/Artifacts. Values with associated negative uncertainties (meaning too much a priori influence) can be used for detection of volcanoes or other high events; however the retrieved value will be too low because the retrieval is biased towards its zero a priori.

4 NRT Data Processing Outline

The Aura MLS Science Data Processing System is described in detail by Cuddy et al. [2006]. In the routine processing of the MLS data, the Level-1 and Level-2 processors (called Product Generation Executables, PGEs) are developed and tested in the Science Computing Facility (SCF). The SCF provides the services and resources to perform scientific algorithm development, science processing software development, scientific quality control, and scientific analysis. The final PGEs for a given MLS data version are delivered for use at the Science Investigator-led Processing System (SIPS). The SIPS provides a facility for producing the standard science data products through processing and reprocessing using the algorithms developed and tested in the SCF. This work leverages the infrastructure and experience within the MLS team built up from operating the SCF and SIPS and the associated interfaces to the NASA Goddard Earth Sciences Data and Information Services Center (GES-DISC).

GES-DISC interface to MLS SIPS The GES-DISC provides the appropriate spacecraft predictive ephemeris, orbit / attitude data and earth motion data. A new NRT Level-0 data product is constructed from Rate Buffered Data (RBD) by sub-dividing the orbit contacts (100 minutes) into files with a granularity of 15 minutes or less. Problems in the data stream involving time gaps, glitches and repeated data records are handled at this stage.

Modifications to the standard processing to provide a Level-1 NRT Processor In the routine processing the Level-1 processor accepts the 2-hr granule Level-0 input and the spacecraft ancillary data, performs the radiometric calibration [Jarnot et al., 2006] and produces the Level-1B data product (calibrated radiances and associated uncertainties) for a single day. For the Level-1 NRT processor only selected GHz radiances needed for the NRT products need be calibrated. The granularity is determined directly by the Level-0 NRT granularity (15 minutes or less).

Modifications to the standard processing to provide a Level-2 NRT Processor In the MLS standard processing the Level-2 processor accepts the Level-1B products and climatology data and produces the Level-2 geophysical data products [Livesey et al., 2006], diagnostic information and summary logs. The full-day is divided into 350 data chunks each consisting of about 10 profiles along the orbit track and each chunk is processed in parallel on a separate processor. For the MLS Level-2 NRT processor the chunk size is determined by the Level-1B NRT data granularity (15 minutes or less).

NRT Data Latency We define the NRT data latency to be the time from the satellite measurement to the production of the Level-2 output data files. Typically most of the data are produced within 5 hours and 94% are produced within 3 hours. MLS NRT data are distributed in granules (chunks) of typical length 46 profiles.

4.1 Recommendation for the treatment of MLS NRT data overlaps

Chunk overlaps (redundant data records) are required so that our NRT processing system produces reliable calibrated radiances and data retrievals across the chunk boundaries. Profiles in the chunk overlaps can be identified from the time stamps in each file. Figure 2 shows an example where the chunk (granule) length is 46 profiles.

The data quality at the beginning and end of a chunk is known to be worse than within the chunk. Therefore, we recommend the following procedure to remove the poorer quality profiles and to prevent using two profiles with the same time stamp:

- 1 Discard the first two profiles and the last three profiles of every chunk as the data quality is known to be poorer at these locations (shaded red in Figure 2).
- 2 After discarding these profiles there is little difference in the data quality in the remaining duplicate profiles (shaded blue in Figure 2) in the overlap region, however it may be expedient to use the profiles in the first chunk (39-43) rather than wait to process the second chunk.
- 3 Poor quality profiles 1-2 in the second chunk (shaded red in Figure 2) will be discarded since the higher quality profiles 37-38 from the first chunk (shaded green in Figure 2) will have been used.
- 4 Higher quality profiles 8-10 (shaded green) in the second chunk will be used in place of the discarded profiles 45-46 in the first chunk (shaded red in Figure 2).

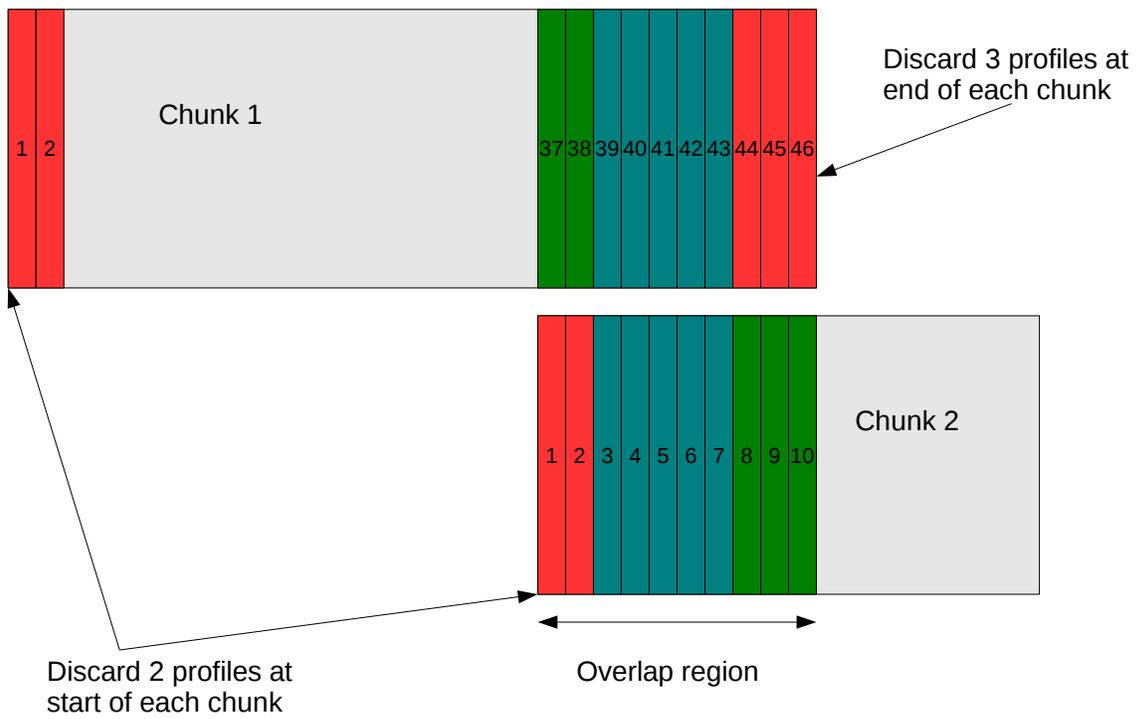


Figure 2: Treatment of MLS NRT data overlaps.

References

- D. T. Cuddy, M. Echeverri, P. A. Wagner, A. Hanzel, and R. A. Fuller. EOS MLS science data processing system: A description of architecture and capabilities. *IEEE Trans. Geosci. Remote Sens.*, 44(5):1192–1198, 2006.
- R F Jarnot, V S Perun, and M J Schwartz. Radiometric and spectral performance and calibration of the GHz bands of EOS MLS. *IEEE Trans. Geosci. Remote Sens.*, 44:1131–1143, 2006.
- N J Livesey, W V Snyder, W G Read, and P A Wagner. Retrieval algorithms for the EOS Microwave Limb Sounder (MLS). *IEEE Trans. Geosci. Remote Sens.*, 44:1144–1155, 2006.
- H. M. Pickett. Microwave Limb Sounder THz module on Aura. *IEEE Trans. Geosci. Remote Sens.*, 44:1122–1130, 2006.
- J W Waters. Microwave limb sounding. In M A Janssen, editor, *Atmospheric Remote Sensing by Microwave Radiometry*, chapter 8, pages 383–496. John Wiley, New York, 1993.
- J W Waters, L Froidevaux, R S Harwood, R F Jarnot, H M Pickett, W G Read, P H Siegel, R E Cofield, M J Filipiak, D A Flower, J R Holden, G K K Lau, N J Livesey, G L Manney, H C Pumphrey, M L Santee, D L Wu, D T Cuddy, R R Lay, M S Loo, V S Perun, M J Schwartz, P C Stek, R P Thurstans, M A Boyles, K M Chandra, M C Chavez, G S Chen, B V Chudasama, R Dodge, R A Fuller, M A Girard, J H Jiang, Y B Jiang, B W Knosp, R C LaBelle, J C Lam, K A Lee, D Miller, J E Oswald, N C Patel, D M Pukala, O Quintero, DM Scaff, W Van Snyder, M C Tope, P A Wagner, and M J Walch. The Earth Observing System Microwave Limb Sounder (EOS MLS) on the Aura satellite. *IEEE Trans. Geosci. Remote Sens.*, 44:1075–1092, 2006.